




Dimensions Ø 569 mm  
H 417.5 mm

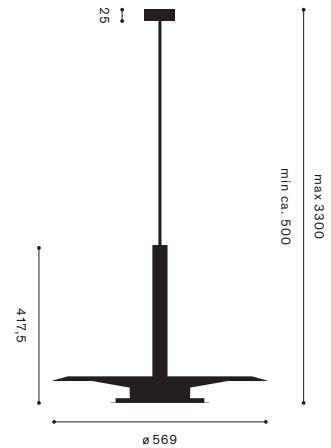

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	31 W
Standby	>0.5 W
Light distribution	38% direct, 62% indirect
Energy efficiency	This product contains light sources of energy efficiency class C
High Durability	60.000 hours
Luminous efficiency	3479 lm
Colour rendition index	CRI Ra > 90
Light colour/	Neutral white 4000 K, Nr. 91306 4 35
Model No.	Warm white 3000 K, Nr. 91306 3 35
	Extra warm white 2700 K, Nr. 91306 2 35
	Tunable white, 2700 - 6500 K, Nr. 91306 7 35
Operation	Dimmable, DALI
Materials	Luminaire head and canopy in metal, powder-coated
Cover of illuminant	PMMA
Wallcase	Driver in the pendulum tube, circuit board in the luminaire head
Weight	ca. 3.5 kg
Protection rating	IP 20
Test marks	CE, ROHS
Warranty	2 years, 5 years on LED and converter
Productdesign	GLARONA kollektion Design Jörg Boner productdesign 2022/23

Light intensity distribution

