


Dimensions Ø 630 mm  
H 59 mm



|                        |  |
|------------------------|--|
| Contents               | LED  |
| Controller             | Premium converter  |
| Power requirements     | 220–240 V, 50 Hz   |
| Power input            | 32 W   |
| Standby                | >0.5 W   |
| Light distribution     | 50% direct, 50% indirect   |
| Energy efficiency      | This product contains light sources of energy efficiency class D |
| High Durability        | 60.000 hours   |
| Luminous efficiency    | 1526 lm  |
| Colour rendition index | CRI Ra > 90  |
| Light colour/          | Neutral white 4000 K, Nr. 90306 4 35                             |
| Model No.              | Warm white 3000 K, Nr. 90306 3 35                                |
|                        | Extra warm white 2700 K, Nr. 90306 2 35                          |
|                        | Tunable white 2700-6500 K, Nr. 90306 7 35                        |
| Operation              | Dimmable, DALI   |
| Materials              | Luminaire head in metal, powder-coated                           |
| Cover of illuminant    | PMMA   |
| Wallcase               | Contains drive   |
| Weight                 | ca. 3.75 kg  |
| Protection rating      | IP 20  |
| Test marks             | CE, ROHS   |
| Warranty               | 2 years, 5 years on LED and converter                            |
| Productdesign          | GLARONA kollektion<br>Design Jörg Boner productdesign 2022/23    |

Light intensity distribution

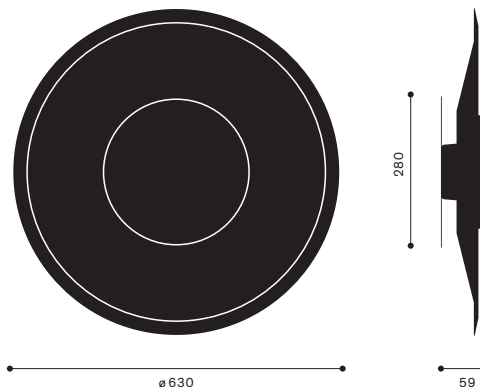