



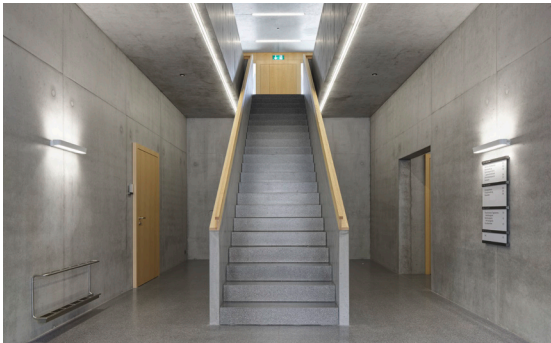

Models Nr. 42010 4 45  
Nr. 42010 3 45

Dimensions H 52 mm  
W 112 mm  
L 623 mm



<b>Contents</b>	<b>LED</b>
Controller	Premium converter
Power requirements	220–240 V, 50–60 Hz
Power input	44 W
Standby	< 0.5 W
Light distribution	33% direct, 67% indirect
<b>Energy efficiency</b>	This product contains light sources of energy efficiency class D
High durability	72,000 hours
Luminous efficiency	5560 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 42010 4 45 Warm white 3000 K, Nr. 42010 3 45
Glare suppression	Structured acrylic glass, UGR < 16
<b>Operation</b>	<b>DALI</b>
<b>Materials</b>	Lampshade and wallcase in metal, white powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 3.4 kg
<b>Protection rating</b>	<b>IP 20</b>
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
<b>Particularities</b>	– Two mounting points for orientation – LED modules according to Zhaga standards (3000 K ca. 10 lm/W less than 4000 K)
<b>Note</b>	

Light intensity distribution

