




Models	Nr. 47011 4 65 Nr. 47011 3 65
Dimensions	Ø 396 mm H 1620 mm

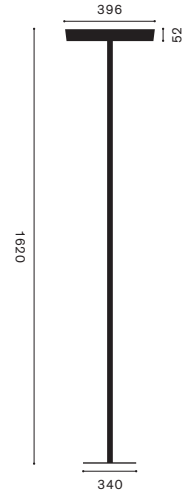

Contents	LED
Controller	ECO converter
Power requirements	220–240 V, 50 Hz
Power input	58 W
Standby	0.5 W
Light distribution	47% direct, 53% indirect
Energy efficiency	This product contains a light source of energy efficiency class c
Luminous efficiency	7191 lm
Colour rendition index	CRI Ra > 90
Light colour	Neutral white 4000 K, Nr. 47011 4 65 Warm white 3000 K, Nr. 47011 3 65
Glare suppression	Structured acrylic glass, UGR < 16*
Operation	Can be dimmed by a key button
Materials	Tube, floor plate and lampshade in metal, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 11.7 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	Optional with a motion and daylight sensor
Note	*Reflectancies of ceiling/wall/floor 0.7/0.5/0.2, room dimensions x = 4H, y = 8H (3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

