




Models	Nr. 47410 4 35 Nr. 47410 3 35
Dimensions	Ø 285 mm H 52 mm

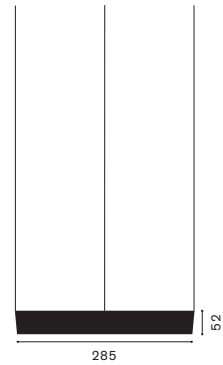

Contents

Controller
Power requirements
Power input
Standby
Light distribution

Energy efficiency

Luminous efficiency
Colour rendition index
Light colour

Glare suppression

Operation

Materials
Cover of illuminant
Wallcase
Weight

Protection rating
Test marks
Warranty

Particularities

Notes

LED

ECO converter
220–240 V, 50 Hz
29 W
0.5 W
50% direct, 50% indirect

This product contains light sources of energy efficiency class c
3546 lm
CRI Ra > 90
Neutral white 4000 K, Nr. 47410 4 35
Warm white 3000 K, Nr. 47410 3 35
Structured acrylic glass, UGR < 16*

Dimmable, DALI

Lampshade in metal, powder-coated
Structured acrylic glass
Contains driver
ca. 4 kg


IP 20
ENEC TÜV SÜD, CE, ROHS
2 years, 5 years on LED and converter

Optional with a motion and daylight sensor

* Reflectancies of ceiling/wall/floor
0.7/0.5/0.2, room dimensions x = 4H, y = 8H
(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

cd/klm

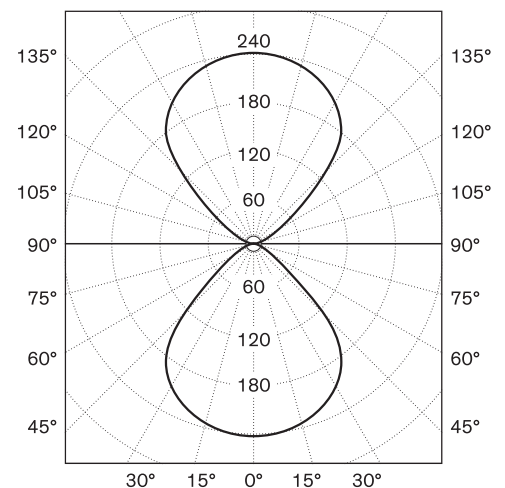

— Lateral light intensity distribution
..... Frontal light intensity distribution