




Models	Nr. 50418 4 85 Nr. 50418 3 85
Dimensions	Ø 598 mm H 52 mm

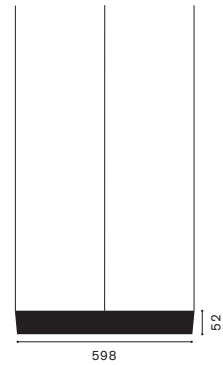

Contents

Controller
Power requirements
Power input
Standby
Light distribution

Energy efficiency

High durability
Luminous efficiency
Colour rendition index
Light colour

Glare suppression

Operation

Materials
Cover of illuminant
Wallcase
Weight

Protection rating
Test marks
Warranty

Particularities

Note

LED

ECO converter
220–240 V, 50 Hz
86 W
0.5 W
48% direct, 52% indirect

This product contains light sources of energy efficiency class c
72,000 hours
13921 lm
CRI Ra > 94
Neutral white 4000 K, Nr. 50418 4 85
Warm white 3000 K, Nr. 50418 3 85
Structured acrylic glass, UGR < 16*

Dimmable, DALI

Lampshade in metal, powder-coated
Structured acrylic glass
Contains driver
ca. 4 kg


IP 20
ENEC TÜV SÜD, CE, ROHS
2 years, 5 years on LED and converter

Optional with a motion and daylight sensor

*Reflectancies of ceiling/wall/floor
0.7/0.5/0.2, room dimensions x = 4H, y = 8H
(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

cd/klm

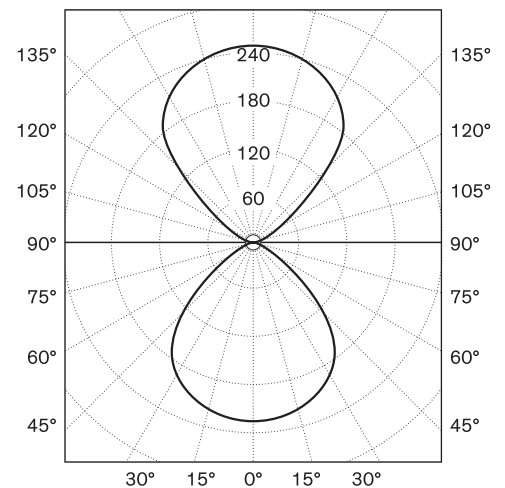

— Lateral light intensity distribution
- - - - Frontal light intensity distribution